



Climbing equipment

(technical specification)

J1605



- 1- **The vertical 95mm square post** are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi and insects.
The posts are protected by injected polyamide caps.




- 2- **The climbing wall** is 21mm thick panels made up of alternating layers of birch. The surface is coated with a film of anti-slip phenolic resin.



- 3- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.



- 4- **The 16mm diameter ropes** are made of galvanised steel cable covered with polyester. The cables are linked together and held in place by injected polyamide spheres.

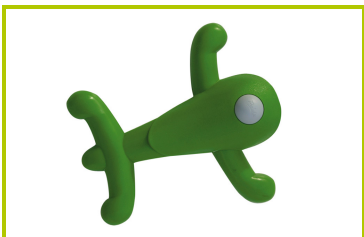

- 5- **The climbing holds** are made of polyamide for its strength and rigidity.



- 6- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.