




1=1.8m 2=0.59m 3=0.43m



Seat comprises 2 painted steel slats 50x25x2,5 mm, and 4 pultruded polyester slats (polyester composite/fibre glass) 58x25x3 mm, RAL 7004. Seat back comprises 2 painted steel slats 50x25x2,5 mm, and 2 pultruded polyester slats (polyester composite/fibre glass) 58x25x3 mm, RAL 7004. Black polyester powdercoated steel uprights, thickness 8mm - Stainless steel brackets and fixings - Fixing on to a concrete block

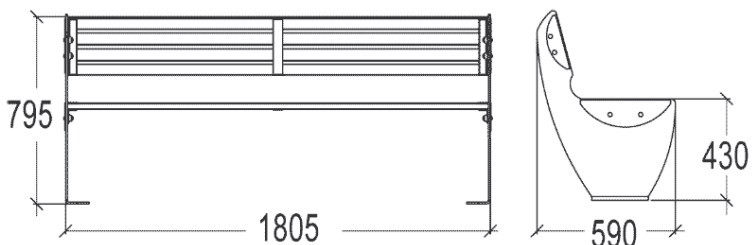

Please enter your username  
<br> and your password. <br> If you don't have a password,  
<br> click here

**INSTALLATION**



00h00

**Kaal = 66 kg**

**Raskeim detail = 14 kg**