




Aquatica

(technical specification)

J1960

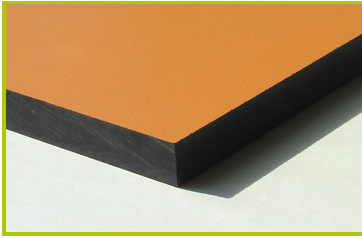

1- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.



2- **The vertical 68mm square post** are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi and insects.
The posts are protected by injected polyamide caps.



3- **The 125mm diameter posts** are made of painted galvanised steel, ensuring robustness and durability. The caps are made of injection moulded polyamide.



4- **The platforms** are 21mm plywood panels made up of layers of birch. The surface is coated with a film of non-slip phenolic resin.




5- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.



6- **The tubular slide** is made of stainless steel.



7- **The 16mm diameter ropes** are made of galvanised steel cable covered with polyester. The cables are linked together and held in place by injected polyamide spheres.

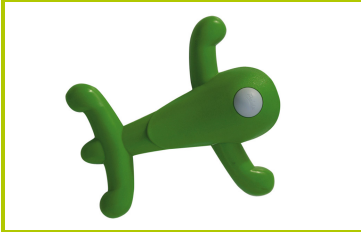

8- **The climbing holds** are made of polyamide for its strength and rigidity.



9- **Plastic parts** are made of injected polyamide.



10-**The abacus spheres** are made of polycarbonate sheets.



11-**The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.