



● **11145 METAL SET**




● **Technical data:**

| | |
|----------------------------|--------------------|
| Dimensions | 8,45 x 6,65 m |
| Safe zone | 10,45 x 9,65 m |
| Total height | 3,0 m |
| Free fall height | 1,0 m |
| Age | 3+ |
| Conformity with PN-EN 1176 | YES |
| Platform | 5x 1,0 m; 1x 0,8 m |
| Slide | 2x 1,0 m |





● 11145 METAL SET

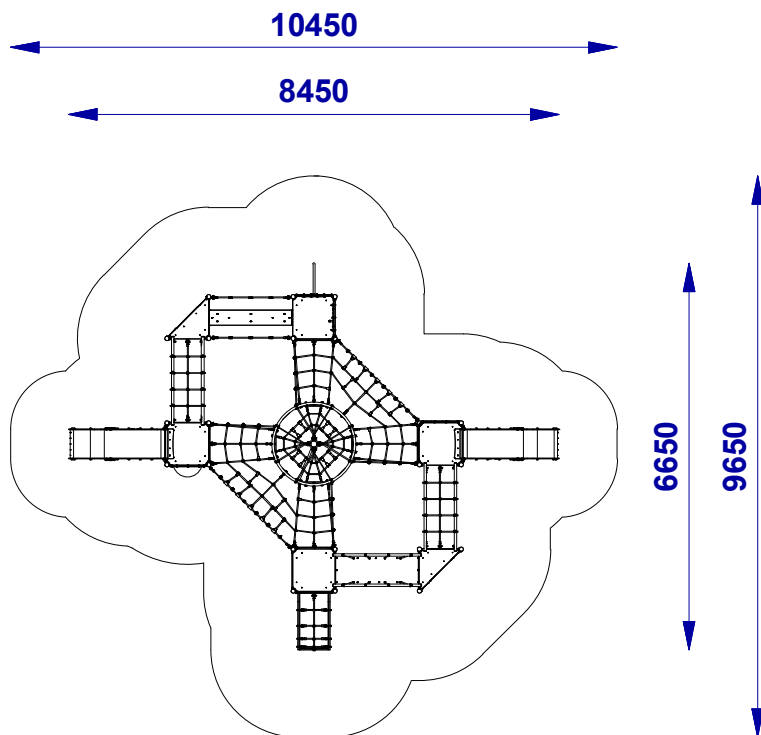

| Set contents: | |
|-----------------------------|------|
| Module: | Qty: |
| 640.SR.HD.008 BO | 1 |
| 640.SR.HD.009 BBUL | 1 |
| 640.SR.HD.010 KIK | 1 |
| 640.SR.HD.017 BSP | 1 |
| 640.SR.HD.033 BBH45 | 2 |
| 640.SR.P.002.0200 MPLW_200 | 1 |
| 640.SR.P.007.0 ML | 1 |
| 640.SR.P.007.0200 ML_200 | 1 |
| 640.SR.P.015.0 MLBL | 1 |
| 640.SR.P.026.0 SOL | 1 |
| 640.SR.W.001.01000 RS_1000 | 1 |
| 640.SR.W.003.01000 SL_1000 | 2 |
| 640.SR.W.014.01000 WLL_1000 | 1 |
| 640.SR.WR.002.01000 W4_1000 | 4 |
| 640.SR.WR.004.00800 W3_800 | 1 |
| 640.SR.WR.004.01000 W3_1000 | 1 |

| | | |
|---------------------|---|---|
| Construction | Galvanized and powder coated steel | ✓ |
| | Stainless steel | |
| | Square 90x90 glued laminated timber, impregnated | |
| Connectors | Stainless and galvanized | ✓ |
| | | |
| Decorative elements | Polyethylene plastic (HDPE) | ✓ |
| | Polycarbonate (PC) | ✓ |
| | Hardwood plywood painted with certified chalkboard paint | |
| Metal elements | Galvanized and powder coated steel | ✓ |
| | Stainless steel | ✓ |
| Slide | Stainless steel with polyethylene plastic (HDPE) | ✓ |
| | Whole polyethylene plastic (LLDPE) | |
| | Whole stainless steel | |
| Ropes | Polypropylene rope with steel core | ✓ |
| Rope connectors | Aluminum and polyamide | ✓ |
| Caps | Polyamide | ✓ |
| Platforms | Polyethylene plastic (HDPE) with antiskid layer | ✓ |
| | Grooved board made of solid wood | |
| Anchoring | Construction elements - 800 mm in ground | ✓ |
| | Powder coated steel post - 800 mm in ground | |
| Chain | Stainless steel | |
| | Galvanized steel | |
| Slings | Stainless steel with bearings | |
| Seats | Flat with aluminum core, covered with rubber, certified | |
| | Bucket with aluminum core, covered with rubber, certified | |
| | Rope "Birds nest" with metal core, certified | |
| Spring | 20 x 200 x 400 mm - certified | |

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

| Material | Grain size [mm] | Depth [mm] | Critical fall height [mm] |
|------------|--------------------------------|------------|---------------------------|
| Turf | - | - | ≤1000 |
| Bark | 20 - 80 | 200 | ≤2000 |
| | | 300 | ≤3000 |
| Wood chips | 5 - 30 | 200 | ≤2000 |
| | | 300 | ≤3000 |
| Sand | 0,25 - 8 | 200 | ≤2000 |
| | | 300 | ≤3000 |
| Gravel | 0,25 - 8 | 200 | ≤2000 |
| | | 300 | ≤3000 |
| Other | as tested to HIC (see EN 1177) | | as tested |

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).

Proposal visualisation. Colors can be different. Ask for available options.