### **Technical Information**



## • 10034 WOODEN SET



#### • Technical data:


**Dimensions** 7,1 x 6,45 m 10,1 x 9,25 m Safe zone **Total height** 3,0 m Free fall height 1,0 m Age 1+ **Conformity with PN-EN 1176 YES Platform** 2x 0,6 m; 2x 1,0 m 1x 0,6 m; 1x 1,0 m Slide



## **Technical Information**



# • 10034 WOODEN SET

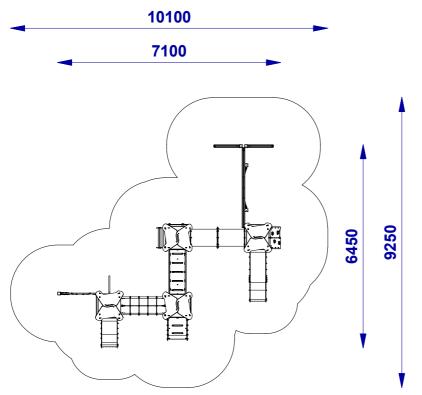

Set contents:		
Module:	Qty:	
640.S.HD.001 BP_WKL	2	
640.S.HD.002 D2_S	4	
640.S.HD.010 KIK	1	
640.S.HD.014 BS	1	
640.S.P.003.002 MT_D	1	
640.S.P.005.0400 MBH_400	1	
640.S.P.007.0 ML	1	
640.S.W.001.00600 RS_600	1	
640.S.W.002.01000 WW_1000	1	
640.S.W.003.00600 SL_600	1	
640.S.W.003.01000 SL_1000	1	
640.S.W.004.00600 TWL_600	1	
640.S.W.006 PS6K	1	
640.S.W.008.01000 DR_HD_1000	1	
640.S.W.015.01000 DSL_1000	1	
640.S.WD.001.00600 W4D_600	2	
640.S.WD.001.01000 W4D_1000	2	

	Galvanized and powder coated steel		
Construction	Stainless steel		
	Square 90x90 glued laminated timber, impregnated		
Connectors	Stainless and galvanized		
Decorative elements	Polyethylene plastic (HDPE)		
	Polycarbonate (PC)		
	Hardwood plywood painted with certified chalkboard paint		
Metal elements	Galvanized and powder coated steel	<b>√</b>	
	Stainless steel	<b>√</b>	
Slide	Stainless steel with polyethylene plastic (HDPE)	<b>√</b>	
	Whole polyethylene plastic (LLDPE)		
	Whole stainless steel		
Ropes	Polypropylene rope with steel core	<b>√</b>	
Rope connectors	Aluminum and polyamide		
Caps	Polyamide		
Platforms	Polyethylene plastic (HDPE) with antiskid layer		
	Anti-slip and waterproof plywood	<b>√</b>	
Anchoring	Construction elements - 800 mm in ground		
	Powder coated steel post - 800 mm in ground	<b>√</b>	
Chain	Stainless steel		
	Galvanized steel		
Slings	Stainless steel with bearings		
Seats	Flat with aluminum core, covered with rubber, certified		
	Bucket with aluminum core, covered with rubber, certified		
	Rope "Birds nest" with metal core, certified		
Spring	20 x 200 x 400 mm - certified		

Proposal visualisation. Colors can be different. Ask for available options.

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

absorbing surfaces.						
Materiał	Grain size [mm]	Depth [mm]	Critical fall height [mm]			
Turf	-	-	≤1000			
Bark	20 - 80	200	≤2000			
		300	≤3000			
Wood chips	5 - 30	200	≤2000			
		300	≤3000			
Sand	0,25 - 8	200	≤2000			
		300	≤3000			
Gravel	0,25 - 8	200	≤2000			
		300	≤3000			
Other	as tested to HIC	as tested				

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).