

play unit Tokio Tower, solo



Age indication



Fitness



Senses



Speed



Social skills



Imagination




Balance

Scope of delivery

14x post construction: softwood or steel
1x platform w. hole: high pressure laminate (HPL)
10x platform: high pressure laminate (HPL)
10x platform construction: hot-dip galvanised steel
6x overclimbing protection device: softwood, hot-dip galvanised steel, high pressure laminate (HPL)
1x climbing board: high pressure laminate (HPL) , glass fibre reinforced plastic (GFRP)
1x climbing board: high pressure laminate (HPL) glass fibre reinforced plastic (GFRP)
3x climbing board: high pressure laminate (HPL)
1x climbing board: softwood, high pressure laminate (HPL), glass fibre reinforced plastic (GFRP)
1x climbing pole: stainless steel (V2A)
1x ladder twisted: stainless steel (V2A), softwood
4x ring ascent: plastic-coated steel cable, stainless steel (V2A)
1x grid tube: stainless steel (V2A)
2x 3D parapet: high pressure laminate (HPL) , softwood, stainless steel (V2A)
1x parapet: high pressure laminate (HPL)
2x parapet: softwood

13x grid parapet: stainless steel (V2A)
5x slide entry plate: high pressure laminate (HPL)
1x acces restriction: high pressure laminate (HPL)
1x play parapet branche: high pressure laminate (HPL), acrylic glass (UV-resistant)
1x play parapet rotating colour disc: high pressure laminate (HPL) , acrylic glass (UV-resistant)
1x play parapet sound: high pressure laminate (HPL) , stainless steel (V2A), plastic-coated steel cable
5x grip set: aluminium, coated
2x slide element curve small 30 degrees: glass fibre reinforced plastic (GFRP)
2x slide element straight: glass fibre reinforced plastic (GFRP)
fittings: stainless steel (V2A)

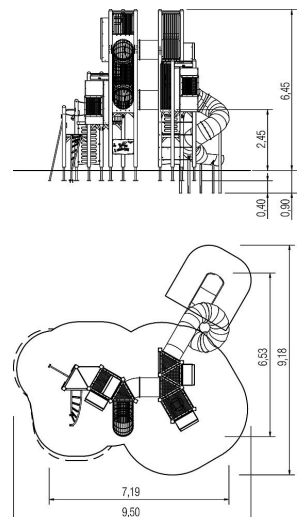

play unit Tokio Tower, solo



Technical data

	Material	Larch GL, larch
	Minimum space	9,53x9,13x6,45 m
	Impact protection net	58,0 m²
	Free falling height	245 cm
	Ground constitution GE/NL/B	at least impact-attenuating tiles
	Ground constitution all except GE/NL/B	at least sand
	mx. number of users	79
	Certificate	Z2_010651_0537_Rev00
	Tested according to standard	EN 1176 - 1/7
	Service interval (in months)	3

Installation information

	Foundations	6x CF
	Fundamentlevel	ET 400
	PF Accessories	-
	PF drainage	-
	PF concrete	-
	PF excavation	-
	CF Accessories	17x 5631120
	CF drainage	-
	CF concrete	3,33 m³
	CF excavation	7,78 m³

Accessories

- Slides for platform heights: 1x 345 cm
- Installation accessories e.g. PF
- Please order accessories separately to complete the appliance.




Gesellschaft
für Klimaschutz
München



5 25 155 041 19

play unit Tokio Tower, solo

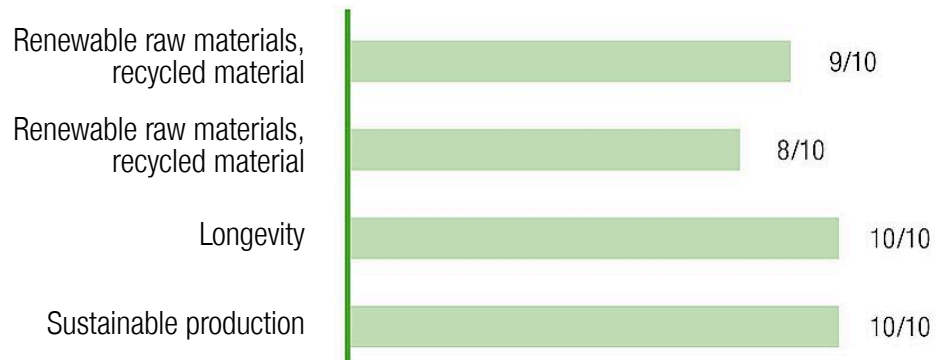

CO₂ emissions of the product

5982,3 kg


**Material share of
renewable raw materials**

37%


Recyclate content

25%

Circularity score



Weighted emission factor
of the product*

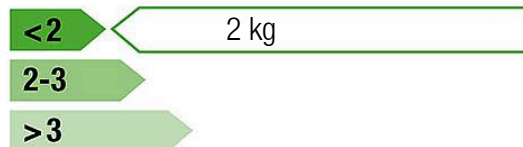

Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024