

hill ramp Oskar



Age indi-
cation



Fitness



Speed



Balance



Living to-
gether




Social
skills

Scope of delivery

1x Rampe: robinia

1x climbing rope: Herkules rope

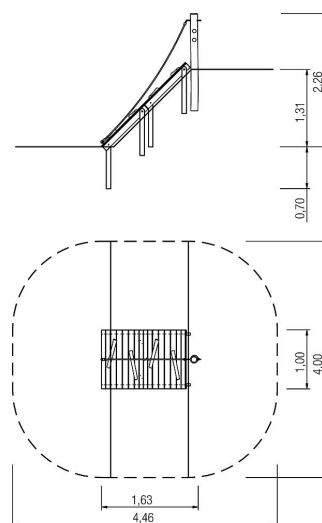

hill ramp Oskar



Technical data

	Material	Robinia natural
	Minimum space	4,65x4,00x2,26 m
	Impact protection net	-
	Free falling height	12 cm
	Ground constitution GE/NL/B	at least stone
	Ground constitution all except GE/NL/B	at least stone
	Largest section	Ø 14x165 cm
	mx. number of users	6
	Certificate	Z2_010651_0535_Rev00
	Tested according to standard	EN 1176 - 1/7

Installation information


	Foundations	7x CF
	Fundamentlevel	ET 700
	Assembly	2 persons/2 h
	PF Accessories	-
	PF drainage	-
	PF concrete	-
	PF excavation	-
	CF Accessories	-
	CF drainage	0,14 m³
	CF concrete	0,14 m³
	CF excavation	0,38 m³



Gesellschaft
für Klimaschutz
München



5 45 396 063 00
hill ramp Oskar

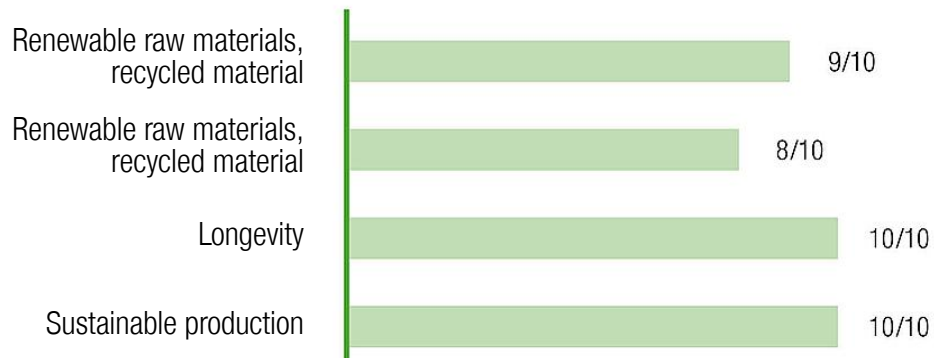

CO₂ emissions of the product

29,2 kg

**Material share of
renewable raw materials**

98%

Recyclate content

2%

Circularity score



**Weighted emission factor
of the product***



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024