

5 56 083 0

Pendulum carousel Hyperion Ø 3,10 m



Age indication



Fitness



Social skills



Balance





Speed

Scope of delivery

1x post Ø 13,9 cm: steel hot-dip galvanised

1x crossbeams Ø 8,9 cm: steel hot-dip galvanised

2x pendulum seat with chain: rubber, stainless steel (VA)

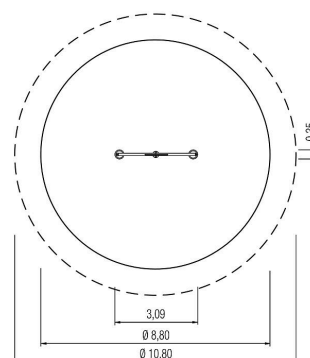

5 56 083 0

Pendulum carousel Hyperion Ø 3,10 m



Technical data

	Material	powdered steel, rubber
	Minimum space	Ø 10,80x3,28 m
	Impact protection net	61,0 m²
	Free falling height	105 cm
	Ground constitution GE/NL/B	at least turf
	Ground constitution all except GE/NL/B	at least sand
	Size	3,09x0,35x2,96 m
	Largest section	330x30x30 cm
	Heaviest section	50 kg
	mx. number of users	2
	Tested according to standard	EN 1176 - 1/5/7

Installation information

	Foundations	1x CF
	Fundamentlevel	ET 900
	Assembly	2 persons/6 h
	CF concrete	0,60 m³
	CF excavation	1,00 m³

Legend: PF=prefabricated foundation, CF=concrete foundation, ET=burial depth, GFRP=glass-fibre reinforced plastic, VA=stainless steel, PH=platform height

eibe Produktion + Vertrieb GmbH & Co. KG | Industriestraße 1 | 97285 Röttingen | Germany | Fon +49 9338 89-0 | Fax +49 9338 89-199 | www.eibe.net