

• 10056 WOODEN SET




• Technical data:

Dimensions	5,55 x 4,95 m
Safe zone	8,05 x 7,45 m
Total height	2,4 m
Free fall height	1,2 m
Age	3+
Conformity with PN-EN 1176	YES
Platform	3 x 1 m; 3 x 1,2 m
Slide	1 x 1 m; 1x 1,2 m



•10056 WOODEN SET

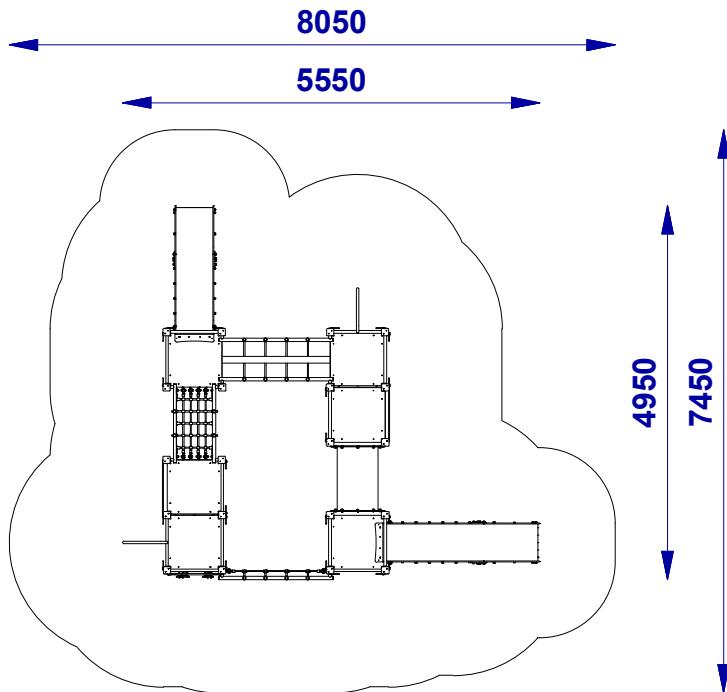

Set contents:	
Module:	Qty:
640.1022.0009 ML_870	1
640.S.HD.001 BP_WKL	2
640.S.P.003.001 MT_K	1
640.S.P.004.01200 MSZ_1200	1
640.S.P.014.0 RL	1
640.S.W.001.01000 RS_1000	1
640.S.W.001.01200 RS_1200	1
640.S.W.003.01000 SL_1000	1
640.S.W.003.01200 SL_1200	1
640.S.W.009.01200 WWP_1200	1
640.S.W.012.01000 DWS_1000	3
640.S.W.012.01200 DWS_1200	4
640.S.WD.002.01000 W4_1000	3
640.S.WD.002.01200 W4_1200	3

Construction	Galvanized and powder coated steel	
	Stainless steel	
	Square 90x90 glued laminated timber, impregnated	✓
Connectors	Stainless and galvanized	✓
	Polyethylene plastic (HDPE)	✓
Decorative elements	Polycarbonate (PC)	
	Hardwood plywood painted with certified chalkboard paint	
Metal elements	Galvanized and powder coated steel	✓
	Stainless steel	✓
	Stainless steel with polyethylene plastic (HDPE)	✓
Slide	Whole polyethylene plastic (LLDPE)	
	Whole stainless steel	
Ropes	Polypropylene rope with steel core	✓
Rope connectors	Aluminum and polyamide	✓
Caps	Polyamide	✓
Platforms	Polyethylene plastic (HDPE) with antiskid layer	✓
	Grooved board made of solid wood	
Anchoring	Construction elements - 800 mm in ground	✓
	Powder coated steel post - 800 mm in ground	
Chain	Stainless steel	
	Galvanized steel	
Slings	Stainless steel with bearings	
	Flat with aluminum core, covered with rubber, certified	
Seats	Bucket with aluminum core, covered with rubber, certified	
	Rope "Birds nest" with metal core, certified	
Spring	20 x 200 x 400 mm - certified	

Proposal visualisation. Colors can be different. Ask for available options.

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

Material	Grain size [mm]	Depth [mm]	Critical fall height [mm]
Turf	-	-	≤1000
Bark	20 - 80	200	≤2000
		300	≤3000
Wood chips	5 - 30	200	≤2000
		300	≤3000
Sand	0,25 - 8	200	≤2000
		300	≤3000
Gravel	0,25 - 8	200	≤2000
		300	≤3000
Other	as tested to HIC (see EN 1177)		as tested

It is required to put particular emphasis on the level of loose surface material, fill to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).