



6+



10





2m




1 = 2,66m
2 = 2,66m
3 = 2,26m



Physical inclusion
Sensory inclusion
Cognitive inclusion

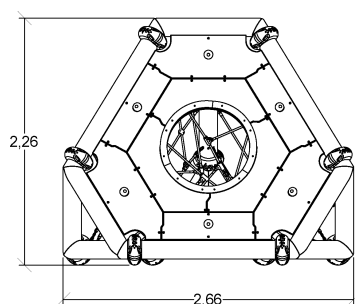

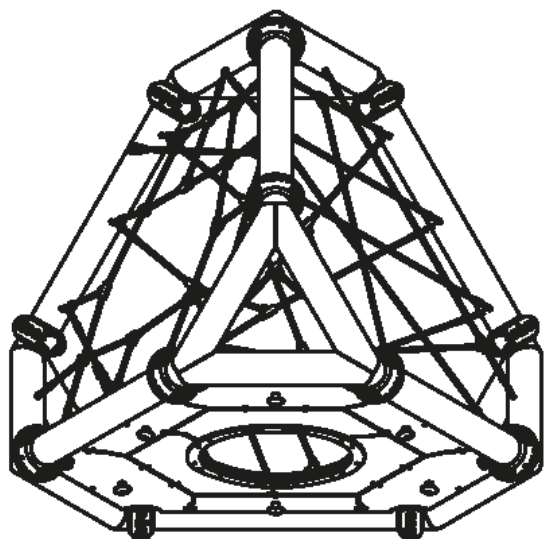

Components






- ❶ Structure Kairn 6100
- ❷ Panneaux hublot Kairn
- ❸ Filet ouverture Kairn
- ❹ Filet Tetra Kairn

Installation of equipment

IMPORTANT: It is essential to refer to the installation instructions for information on the size of the safety areas.

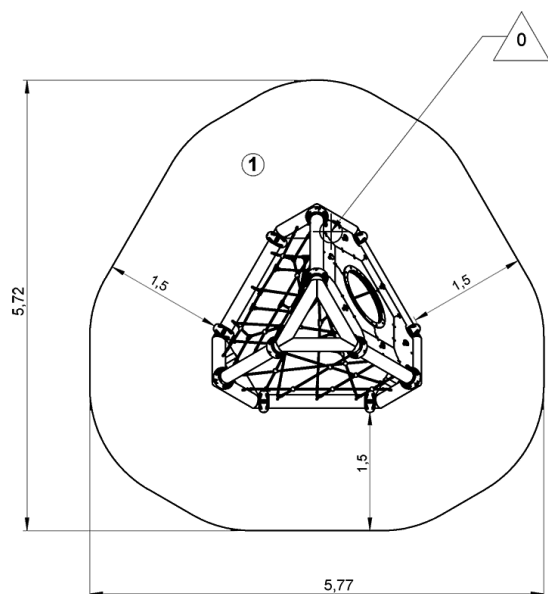-  Impact area (minimum normative surface)
-  Free space



1	 2m	 26m ²
---	---	---



2

0m³

26m²

520kg

75kg

EN
1176

Environmental Indicators

Repairability



/10

Carbon footprint



3,64 KgCO₂/Kg

Recyclable materials



75,00%

ECO-matériaux: 38%

Recycled materials



38,89%

Bio-sourced materials



0,00%