

Play unit Toprope



Age indication



Fitness



Balance




Speed

Scope of delivery

29x post construction: softwood or steel
 8x platform: high-pressure-laminate (HPL)
 8x platform construction: hot-dip galvanised steel
 8x frame trim narrow: high-pressure-laminate (HPL)
 1x handrail slide: stainless steel (V2A)
 1x climbing chimney: softwood, high-pressure-laminate (HPL), stainless steel (V2A), glas fibre reinforced plastic (GFRP)
 3x climbing board: high-pressure-laminate (HPL) , glas fibre reinforced plastic (GFRP)
 1x ramp: softwood, high-pressure-laminate (HPL), stainless steel (V2A)
 1x hanging nets: softwood, plastic-coated steel cable
 1x shimmy beam: softwood
 1x climbing arch: softwood, high-pressure-laminate (HPL), stainless steel (V2A)
 1x warrior ramp: softwood, high-pressure-laminate (HPL)
 3x tangle tower: softwood
 7x parapet: high-pressure-laminate (HPL)
 3x passage safety device: plastic-coated steel cable, stainless steel (V2A)
 7x access restriction: high-pressure-laminate (HPL)

1x balancing wall PH 450: hot-dip galvanised steel, softwood, high-pressure-laminate (HPL)
 1x balancing wall PH 950: hot-dip galvanised steel, softwood, high-pressure-laminate (HPL)
 3x grip set: aluminium, coated
 fittings: stainless steel (V2A)

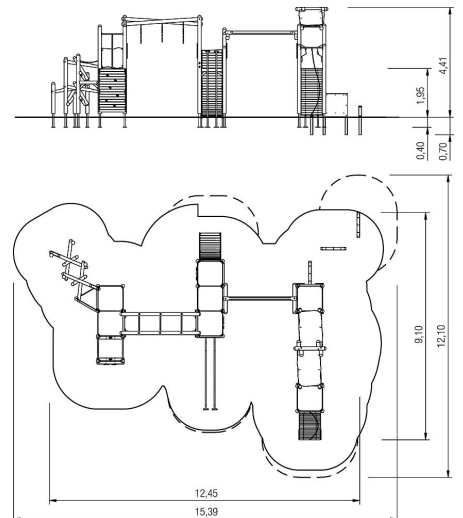

Play unit Toprope



Technical data

	Material	SW pi
	Minimum space	15,42x12,10x4,79 m
	Impact protection net	116,5 m ²
	Free falling height	299 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	mx. number of users	76
	Certificate	Z2_010651_0527_Rev00
	Tested according to standard	EN 1176 - 1/3/7
	Service interval (in months)	1

Installation information

	Foundations	37x CF or 3x CF + 33x PFs
	Fundamentlevel	ET 400/700
	Assembly	3 persons/10 h
	PF Accessories	33x 5632540
	PF drainage	0,29 m ³
	PF concrete	1,15 m ³
	PF excavation	9,87 m ³
	CF Accessories	35x 5631120
	CF drainage	0,29 m ³
	CF concrete	2,81 m ³
	CF excavation	6,18 m ³

Legend: PF=prefabricated foundation, CF=concrete foundation, ET=burial depth, GFRP=glass-fibre reinforced plastic, VA=stainless steel, PH=platform height



Gesellschaft
für Klimaschutz
München



5 25 709 011 72

Play unit Toprope



CO₂ emissions of the product

5276,6 kg

**Material share of
renewable raw materials**

54%

Recyclate content

18%

Circularity score



**Weighted emission factor
of the product***



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024