

play unit Urban Climbing



Age indication



Fitness



Balance





Speed

Scope of delivery

18x post construction: softwood or steel
 5x platform: high-pressure-laminate (HPL)
 5x platform construction: hot-dip galvanised steel
 6x frame trim narrow: high-pressure-laminate (HPL)
 1x branches ascent: softwood
 1x handrail slide: stainless steel (V2A)
 2x climbing board: high-pressure-laminate (HPL), glas fibre reinforced plastic (GFRP)
 1x shimmy frame: softwood, plastic-coated steel cable, stainless steel (V2A)
 1x net bridge up and down: softwood, plastic-coated steel cable
 1x warriorramp: softwood, high-pressure-laminate (HPL)
 1x swirling rope ladders: softwood, stainless steel (V2A), plastic-coated steel cable, plastic
 6x parapet: high-pressure-laminate (HPL)
 2x passage safety device: stainless steel (V2A)
 6x access restriction: high-pressure-laminate (HPL)
 1x balancing wall PH 1450: hot-dip galvanised steel, softwood, high-pressure-laminate (HPL)
 1x balancing wall PH 450: hot-dip galvanised steel, softwood, high-pressure-laminate (HPL)

1x grip set: aluminium, coated
 fittings: stainless steel (V2A)

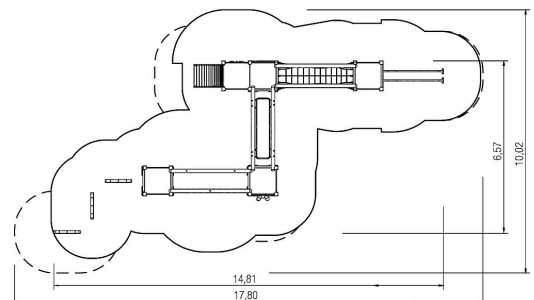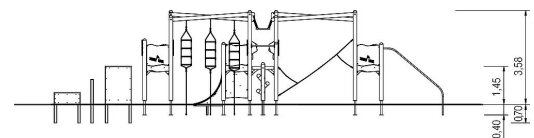

play unit Urban Climbing



Technical data

	Material	SW pi
	Minimum space	17,80x10,02x4,07 m
	Impact protection net	87,5 m²
	Free falling height	228 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	mx. number of users	44
	Certificate	Z2_010651_0537_Rev00
	Tested according to standard	EN 1176 - 1/7
	Service interval (in months)	3

Installation information

	Foundations	28x CF or 25x PFs + 3x CF
	Fundamentlevel	ET 400/700
	Assembly	3 persons/12 h
	PF Accessories	25x 5632540
	PF drainage	0,29 m³
	PF concrete	1,15 m³
	PF excavation	8,04 m³
	CF Accessories	26x 5631120
	CF drainage	0,29 m³
	CF concrete	2,38 m³
	CF excavation	5,17 m³




Gesellschaft
für Klimaschutz
München



5 25 710 011 72

play unit Urban Climbing

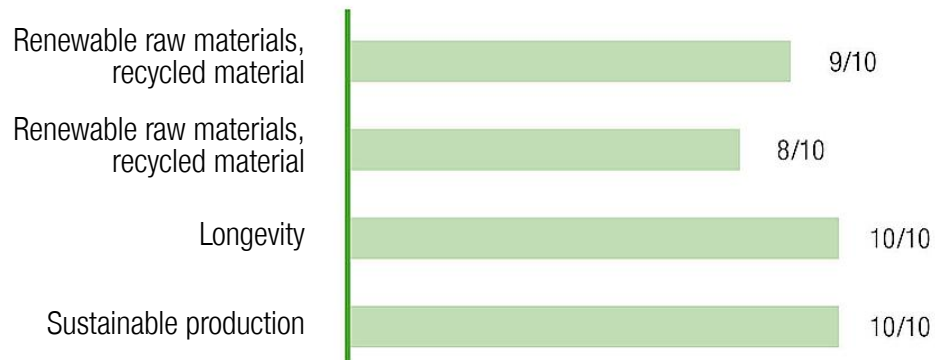

CO₂ emissions of the product

3623,8 kg


**Material share of
renewable raw materials**

47%

Recyclate content

20%

Circularity score



**Weighted emission factor
of the product***



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024