

play unit Pinkpoint



Age indication



Fitness




Balance



Speed

Scope of delivery

24x post construction: softwood or steel
 1x platform: high-pressure-laminate (HPL) , softwood
 7x platform: high-pressure-laminate (HPL)
 7x platform construction: hot-dip galvanised steel
 6x frame trim narrow: high-pressure-laminate (HPL)
 1x branches ascent: softwood
 1x climbing chimney: softwood, high-pressure-laminate (HPL), stainless steel (V2A), glas fibre reinforced plastic (GFRP)
 1x ramp: softwood, high-pressure-laminate (HPL), stainless steel (V2A)
 1x boulder line: softwood, high-pressure-laminate (HPL)
 1x gorge jump: softwood, plastic-coated steel cable, stainless steel (V2A)
 1x slackline: softwood, plastic-coated steel cable
 1x climbing wall: softwood, plastic-coated steel cable
 1x stork's gait: softwood, chain suspension (V2A), post connection (V2A), plastic-coated steel cable
 15x parapet: high-pressure-laminate (HPL)
 3x passage safety device: stainless steel (V2A)
 6x access restriction: high-pressure-laminate (HPL)
 1x grip set: aluminium, coated

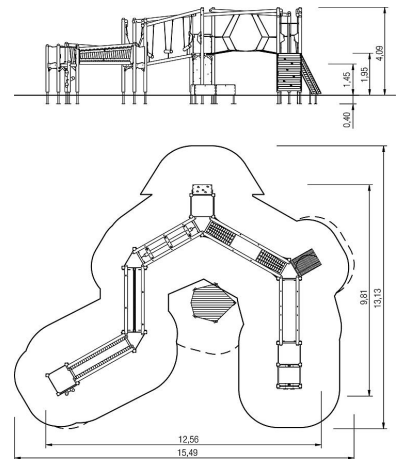

play unit Pinkpoint



Technical data

	Material	SW pi
	Minimum space	15,49x13,13x4,63 m
	Impact protection net	114,0 m ²
	Free falling height	284 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	mx. number of users	70
	Certificate	Z2_010651_0537_Rev00
	Tested according to standard	EN 1176 - 1/7
	Service interval (in months)	3

Installation information

	Foundations	37x CF or 36x PFs
	Fundamentlevel	ET 400
	Assembly	3 persons/12 h
	PF Accessories	36x 5632540
	PF drainage	-
	PF concrete	-
	PF excavation	8,24 m ³
	CF Accessories	37x 5631120
	CF drainage	-
	CF concrete	1,82 m ³
	CF excavation	4,24 m ³

Legend: PF=prefabricated foundation, CF=concrete foundation, ET=burial depth, GFRP=glass-fibre reinforced plastic, VA=stainless steel, PH=platform height



Gesellschaft
für Klimaschutz
München



5 25 711 011 72 play unit Pinkpoint



CO₂ emissions of the product

4305,4 kg

**Material share of
renewable raw materials**

62%

Recyclate content

13%

Circularity score



**Weighted emission factor
of the product***



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024