

Climbing combination Summit, solo



Age indi-
cation



Fitness



Balance




Social
skills



Speed

Scope of delivery

2x post construction: wood and steel
7x post construction: softwood or steel
1x frame panel small: high-pressure laminate (HPL)
1x crossbar 01 ascent: softwood, high-pressure laminate (HPL)
1x tangle of ropes: plastic-coated steel rope, stainless steel (V2A)
2x parapet: high-pressure laminate (HPL)
1x handles: aluminium, coated
1x climbing structure: softwood, plastic-coated steel rope, steel galvanised
fittings: stainless steel (V2A)

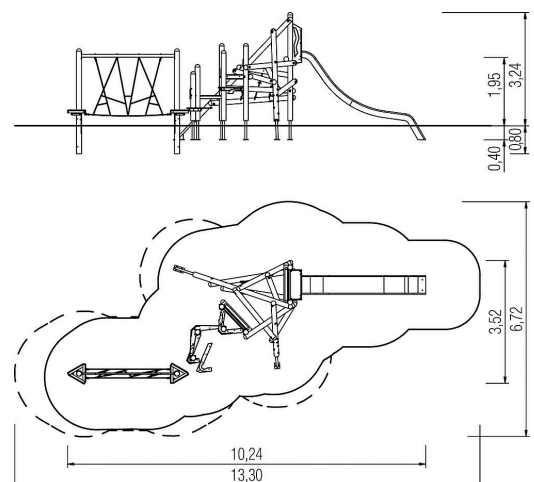

Climbing combination Summit, solo



Technical data

	Material	SW pi
	Minimum space	13,30x6,72x3,75 m
	Impact protection net	47,5 m²
	Free falling height	195 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	Size	10,24x3,52x3,24 m
	mx. number of users	41
	Tested according to standard	EN 1176 - 1/7
	Service interval (in months)	3

Installation information

	Foundations	11x CF or 3x PFs + 8x CF
	Fundamentlevel	ET 400/800
	PF Accessories	3x 5632540 + 7x 5631120
	PF drainage	0,05 m³
	PF concrete	0,55 m³
	PF excavation	1,95 m³
	CF Accessories	10x 5631120
	CF drainage	0,05 m³
	CF concrete	0,69 m³
	CF excavation	1,60 m³

Accessories

- Slides for platform heights: 1x 195 cm
- Installation accessories e.g. PF
- Please order accessories separately to complete the appliance.