

Climbing combination Nexus, solo



Age indi-
cation



Fitness



Balance




Social
skills



Speed

Scope of delivery

8x post construction: softwood or steel
1x twisted ladder: stainless steel (V2A), softwood
1x stork step: softwood, chain suspension (V2A), post
connection (V2A), plastic-coated steel rope
2x parapet: high-pressure laminate (HPL)
1x passage protection: softwood
2x access restriction: high-pressure laminate (HPL)
1x handles: aluminium, coated
1x climbing structure: softwood, plastic-coated steel rope,
steel galvanised
fittings: stainless steel (V2A)

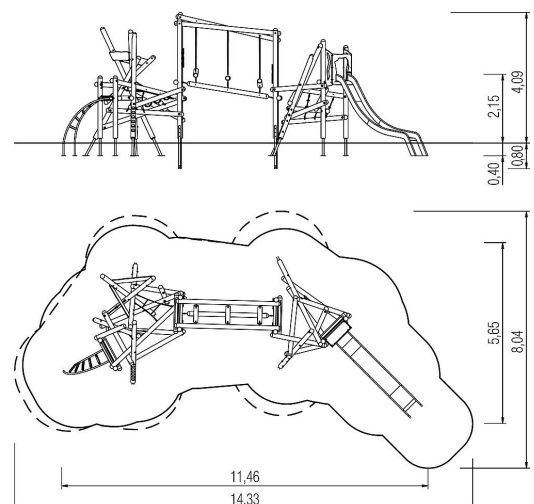

Climbing combination Nexus, solo



Technical data

	Material	SW pi
	Minimum space	14,33x8,04x4,09 m
	Impact protection net	65,5 m²
	Free falling height	215 cm
	Ground constitution GE/NL/B	at least sand
	Ground constitution all except GE/NL/B	at least sand
	Size	11,46x5,65x4,09 m
	mx. number of users	53
	Tested according to standard	EN 1176 - 1/7
	Service interval (in months)	3

Installation information

	Foundations	16x CF or 14x CF + 2x PFs
	Fundamentlevel	ET 400
	PF Accessories	5x 5632540 + 11x 5631120
	PF drainage	0,10 m³
	PF concrete	0,94 m³
	PF excavation	2,62 m³
	CF Accessories	13x 5631120
	CF drainage	0,10 m³
	CF concrete	1,04 m³
	CF excavation	2,38 m³

Accessories

- Slides for platform heights: 1x 195 cm
- Installation accessories e.g. PF
- Please order accessories separately to complete the appliance.